AQUATru® BY IDEAL LIVING PRO SERIES

Business Solutions for Healthier and Safer Water

On-Wall Bottle Filler with Bi-Level Bubbler

Provides chilled and healthy filtered water delivered by a touch-free system.

- The Stainless Steel exterior ensures durability and resistance to rust and stains with a modern industrial design.
- Optimum energy efficiency - R290 Refrigerant provides colder water quicker and more sustainable than other refrigerant gases.
- A high-efficiency flow meter maximizes filter life and minimizes the cost of ownership.
- No fuss filter changing - Filter life monitor and large cabinet space make filter changes quick and easy.

Control Panel with Bottles Saved Counter and Change Filter Alerts

Secondary Features

- Laminar flow provides a clean fill with minimal splash.
- Modern Industrial Design.
- The functional drain collects runoff and prevents standing water.
- Complies with ADA & ICC A1171 accessibility requirements when installed according to the requirements outlined in these standards. (Installation may require additional components and/or construction features to be fully compliant.)

Enterprise.idealliving.com

©2024 AquaTru, LLC. All Rights Reserved. Patents Pending Worldwide. 06.24.R2

Sales Department
14724 Ventura Blvd., Suite 200
Sherman Oaks, CA 91403
sales@idealliving.com
(800) 226-1513

On-Wall Bottle Filler with Bi-Level Bubbler

Product Description

AquaTru Refrigerated Surface Mount Bi-Level Bubbler with Bottle Filler. Chilling Capacity* of 8.0 GPH (gallons per hour). Features include Antimicrobial components**, Filtered, Hands Free, Laminar Flow, Real Drain, Visual Filter Monitor. Electronic Bottle Filler and Bubblers Activated by hands free sensor(s). The product is wall mounted, for indoor and covered outdoor applications. Unit certified to UL 399 and CAN/CSA C22.2 No. 120.

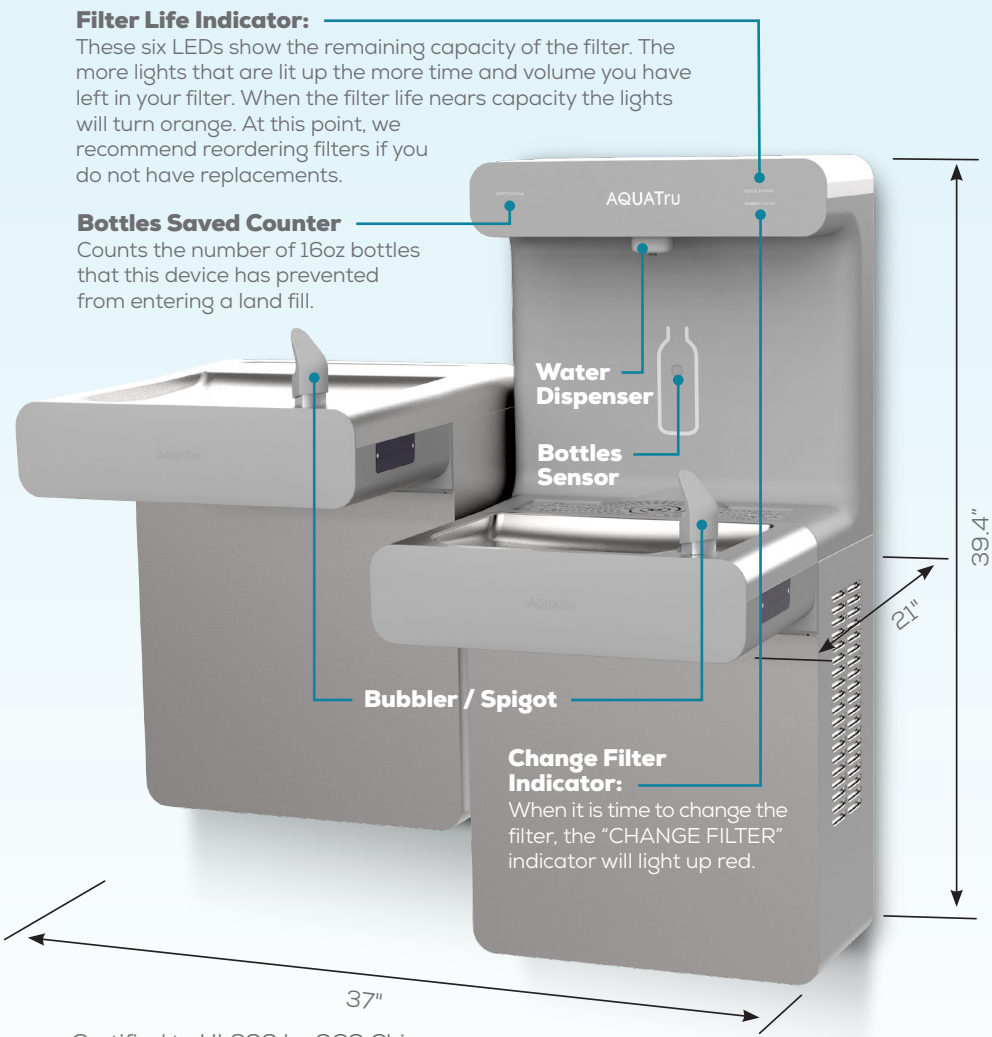

Certified to UL399 by SGS China

Certified to NSF/ANSI 42, 53, & 372 (lead free), ASME A112.19.3/CSA B45.4, and CAN/CSA C22.2 No. 120 by IAPMO R&T

Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority having jurisdiction if necessary.

Product Specifications

Water	Refrigerated only
Filter Stages	Sediment and Carbon Block; removes taste, odor, lead and more
Finish	Stainless Steel and Textured Plastic
Power	120 VAC 60hz
Activation by	IR Sensors
No. of Stations Served	2
Mounting Type	Wall Mounted
Chilling Capacity	8 GPH
Cooling Power	440W
Dimensions (L x W x H)	21" X 37" X 39.4"
Approx. Shipping Weight	85lbs and 35lbs
Installation Location	Indoor, outdoor covered
Rated Flow Rate	1 GPM

*Chilling capacity is based on ASHRAE 18 testing conditions with 80°F inlet water and 90°F Ambient temperature.

**Antimicrobial claims are in reference to components manufactured with antimicrobial agents, helping to provide clean, stain- and odor-free surfaces.