AQUATru® BY IDEAL LIVING PRO SERIES

Business Solutions for Healthier and Safer Water

On-Wall Bottle Filler

Provides chilled and healthy filtered water delivered by a touch-free system.

- Stainless Steel exterior ensures durability and resistance to rust and stains with a modern industrial design.
- Optimum energy efficiency - R290 Refrigerant provides colder water quicker and is more sustainable than other refrigerant gases.
- High-efficiency flow meter maximizes filter life and minimizes the cost of ownership.
- No fuss filter changing - Filter life monitor and large cabinet space make filter changes quick and easy.

Control Panel with Bottles Saved Counter and Change Filter Alerts

Secondary Features

- Laminar flow provides a clean fill with minimal splash.
- Stainless Steel exterior.
- The functional drain collects runoff and prevents standing water.
- Complies with ADA & ICC A1171 accessibility requirements when installed according to the requirements outlined in these standards. (Installation may require additional components and/or construction features to be fully compliant.)

Enterprise.idealliving.com

©2024 AquaTru, LLC. All Rights Reserved. Patents Pending Worldwide. 06.24.R1

Sales Department
14724 Ventura Blvd., Suite 200
Sherman Oaks, CA 91403
sales@idealliving.com
(800) 226-1513

AQUATru® BY IDEAL LIVING PRO SERIES

Tested, Tried and TRU

On-Wall Bottle Filler

Filter Life Indicator:
These six LEDs show the remaining capacity of the filter. The more lights that are lit up the more time and volume you have left in your filter. When the filter life nears capacity the lights will turn orange. At this point, we recommend reordering filters if you do not have replacements.

Bottles Saved Counter
Counts the number of 16oz bottles that this device has prevented from entering a land fill.

Water Dispenser

Bottles Sensor

Drip Tray

Change Filter Indicator:
When it is time to change the filter, the "CHANGE FILTER" indicator will light up red.

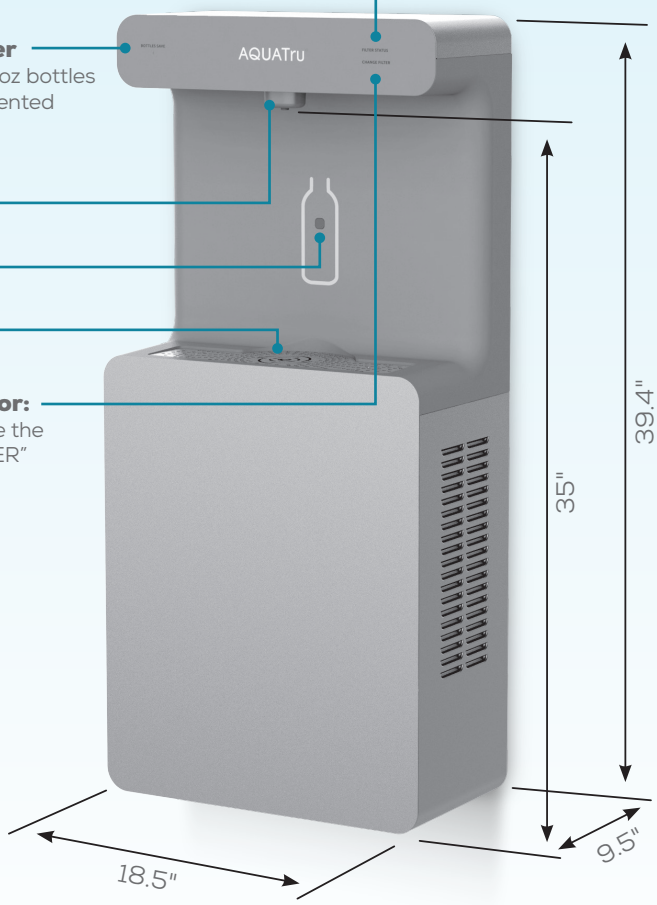

Product Specifications

Water	Refrigerated only
Filter Stages	Carbon
Finish	Stainless Steel and Textured Plastic
Power	120 VAC 60hz
Activation by	IR Sensor
No. of Stations Served	1
Mounting Type	Wall Mounted
Chilling Capacity	8 GPH
Cooling Power	440W
Dimensions (L x W x H)	18.5" X 9.5" X 39.4"
Approx. Shipping Weight	70lbs
Installation Location	Indoor, outdoor covered
Rated Flow Rate	1 GPM

Certified to UL399 by SGS China

Certified to NSF/ANSI 42, 53, 61 (Q≤1), & 372 (lead free), ASME A112.19.3/CSA B45.4, and CAN/CSA C22.2 No. 120 by IAPMO R&T

Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

For over 25 years, Ideal Living has been enhancing quality wellness by sharing superior, science-backed products with our customers. From pure air to pure water, Ideal Living is on a mission to bring wellness into the workplace.

Who is Ideal Living? We are compassionate innovators who place science and accessibility above all else. Though our team members come from around the world, we have one major thing in common: **we care.**

Enterprise.idealliving.com