

Business Solutions for Healthier and Safer Water



On-Wall Bottle Filler with Bubbler

Provides chilled and healthy filtered water delivered by a touch-free system.

- The Stainless Steel exterior ensures durability and resistance to rust and stains with a modern industrial design.
- Optimum energy efficiency - R290 Refrigerant provides colder water quicker and more sustainable than other refrigerant gases.
- A high-efficiency flow meter maximizes filter life and minimizes the cost of ownership.
- No fuss filter changing - Filter life monitor and large cabinet space make filter changes quick and easy.



Secondary Features

- Laminar flow provides a clean fill with minimal splash.
- Modern Industrial Design.
- The functional drain collects runoff and prevents standing water.
- Complies with ADA & ICC A1171 accessibility requirements when installed according to the requirements outlined in these standards. (Installation may require additional components and/or construction features to be fully compliant.)



Control Panel with Bottles Saved Counter and Change Filter Alerts



On-Wall Bottle Filler with Bubbler

Update Photo. Do we have any new images?



Product Description

Aquatru Refrigerated Surface Mount Bottle Filling Station. Stainless Steel. Chilling Capacity* of 8.0 GPH (gallons per hour). Features include Antimicrobial** components, Filtered, Hands-Free, Laminar Flow, Real Drain, and Visual Filter Monitor. Electronic Bottle Filler Sensor activation. The product is wall mounted, for indoor and covered outdoor applications. Unit certified to UL 399 and CAN/CSA C22.2 No. 120.

Filter Life Indicator:

These six LEDs show the remaining capacity of the filter. The more lights that are lit up the more time and volume you have left in your filter. When the filter life nears capacity the lights will turn orange. At this point, we recommend reordering filters if you do not have replacements.

Bottles Saved Counter

Counts the number of 16oz bottles that this device has prevented from entering a land fill.


Water Dispenser

Bottles Sensor

Bubbler / Spigot

Change Filter Indicator:

When it is time to change the filter, the "CHANGE FILTER" indicator will light up red.

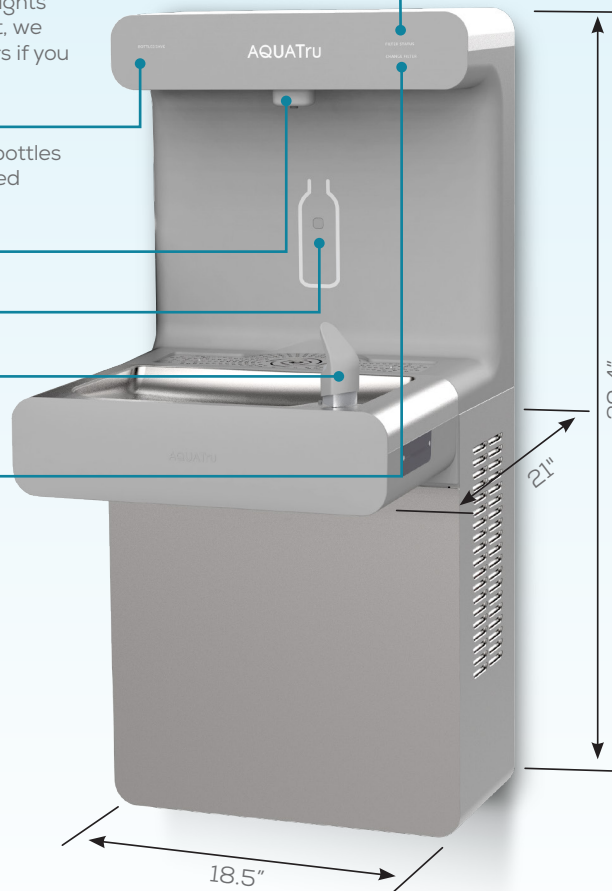

Product Specifications

Water	Refrigerated only
Filter Stages	Sediment and Carbon Block; removes taste, odor, lead, and more
Finish	Stainless Steel and Textured Plastic
Power	120 VAC 60hz
Activation by	IR Sensor
No. of Stations Served	1
Mounting Type	Wall Mounted
Chilling Capacity	8 GPH
Cooling Power	440W
Dimensions (L x W x H)	21" X 18.5" X 39.4"
Approx. Shipping Weight	85lb
Installation Location	Indoor, outdoor covered
Rated Flow Rate	1 GPM

Certified to UL399 by SGS China

Certified to NSF/ANSI 42, 53, & 372 (lead free), ASME - A112.19.3/CSA B45.4, and CAN/CSA C22.2 No. 120 by IAPMO R&T

Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local authority having jurisdiction if necessary.



*Chilling capacity is based on ASHRAE 18 testing conditions with 80°F inlet water and 90°F Ambient temperature.

**Antimicrobial claims are in reference to components manufactured with antimicrobial agents, helping to provide clean, stain- and odor-free surfaces.